



## Hammond Watertight ABS Flat Lid Boxes - 1554 / 1555

Rugged electronic or electrical watertight enclosure • Mounting feet available


- Light grey ABS material carries a rating of UL94 HB and is not recommended for outdoor use.
- Refer to Polycarbonate series for outdoor use.
- Lid is secured with self capturing M4 stainless machine screws into integral stainless steel bushings to avoid corrosion with dissimilar metals.
- Gasketed lid with high temp. UL listed silicon gasket material and 2 piece 'tongue & groove' construction to protect against access of oil, dust and water.
- Meets IP 66 & NEMA 4, 4X, 12 & 13 ratings.
- Vertical card guides moulded in and integral PCB mounts and DIN rail mounting tabs except for smallest sizes BGY & CGY of both series. Options vary with the size. Refer to photo tables on www.hammondmfg.com. For internal views of each size, also for detailed drawings and CAD files.



Optional gear plate



26-1554 Series Flat lid


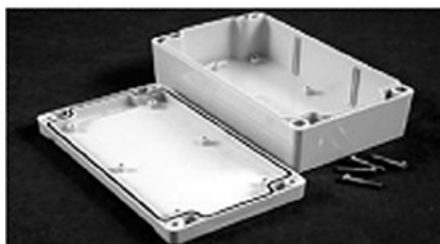


26-1555 Series Recessed lid for membrane keypad & PCB spacers moulded into lid.



### Accessories

Feet Kit  
(Part Number 26-1554FT)  
Feet allow box to mount horizontally or vertically.



Part Number - ABS		Dimensions (mm)		
Flat Lid	Recessed Lid	Length	Width	Height (Base Only)
26-1554BGY	26-1555BGY	65	65	40
26-1554EGY	26-1555EGY	90	90	60
26-1554CGY	26-1555CGY	120	65	40
26-1554DGY	26-1555DGY	120	65	60
26-1554FGY	26-1555FGY	120	90	60
26-1554GGY	26-1555GGY	120	90	80
26-1554NGY	26-1555NGY	120	120	60
26-1554PGY	26-1555PGY	120	120	80
26-1554JGY	26-1555JGY	160	90	60
26-1554KGY	26-1555KGY	160	90	90
26-1554RGY	26-1555RGY	160	160	60
26-1554SGY	26-1555SGY	160	160	90
26-1554HGY	26-1555HGY	180	120	60
26-1554TGY	26-1555TGY	180	120	90
26-1554UGY	26-1555UGY	200	120	90
26-1554VGY	26-1555VGY	240	160	90