


4206 – Stainless Steel Feet

Stainless steel base and stud • Maximum static load calculated with vertical stud

* Max Static Load

Part Number	D	A	d	l	Wrench	Kg*
11-AF113SS16-58	113	100	M16	58	13	1000
11-AF113SS16-145	113	187	M16	145	13	1000
11-AF113SS20-107	113	152	M20	107	17	1000
11-AF113SS20-157	113	202	M20	157	17	1000
11-AF113SS24-90	113	138	M24	90	19	1000
11-AF113SS24-162	113	210	M24	162	19	1000
11-AF113SS30-125	113	173	M30	125	24	1000

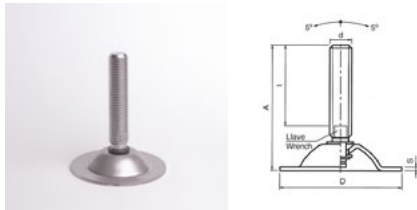


4206 - Stainless Steel Feet with Holes

Stainless Steel base and stud • Maximum static load calculated with vertical stud

* Max Static Load

Part Number	D	A	d	l	D1	Wrench	Kg*
11-AFH113SS16-58	113	100	M16	58	95	13	1000
11-AFH113SS16-145	113	187	M16	145	95	13	1000
11-AFH113SS20-107	113	152	M20	107	95	17	1000
11-AFH113SS20-157	113	202	M20	157	95	17	1000
11-AFH113SS24-90	113	138	M24	90	95	19	1000
11-AFH113SS24-162	113	210	M24	162	95	19	1000
11-AFH113SS30-125	113	173	M30	125	95	24	1000

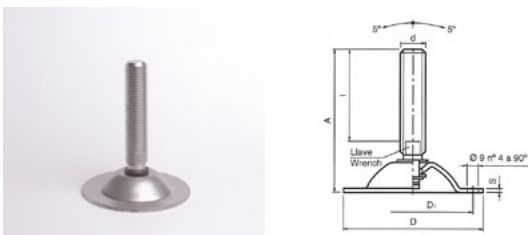

8208- Stainless Steel Feet with non-slip nitrile rubber pad bonded to base

Stainless Steel base and stud • Maximum static load calculated with vertical stud

* Max Static Load

Part Number	D	d	A	H	H1	Kg
11-FFSS40S8-40	50	M8	60	74	3	450
11-FFSS40S10-60	50	M10	80	94	3	600

